



- ・形 G2RV/G3RV-ST-□□□□にご使用ください。
形 G2RV/G3RV-SR-□□□□にご使用できません。
- ・下記の状態での使用および保管は、万が一の場合故障や誤動作、特性劣化が起こる恐れがありますので避けてください。
 - ・本体へ直接振動や衝撃が伝わる場所
 - ・ソケットを溶剤やアルカリ剤に触れる恐れのある場所
- ・短絡バーを取り付ける際は短絡バー挿入口に差し込み全端子を奥まで押し込んでください。



完全な挿入
全端子が奥まで挿入されている。




不完全な挿入
全端子が奥まで挿入されていない。




不完全な挿入

誤った取り付け
端子の浮きあり。




●短絡バーの取り付けに際して

- ・中間のピンは工具で折り曲げ、切り取って使用することができます。

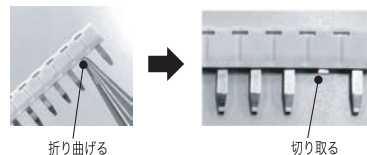

- ・短絡バーは任意の極数にカット可能です。樹脂部の方から工具を入れ、端子間の樹脂部の溝に沿ってカットします。カットする際には端子の潰れなどの変形がないようにご注意ください。また、カット面の金属が露出することになりますので、人体への安全および隣り合う製品との絶縁対策が必要です。対策として、絶縁板/パーティションプレート形 P2RV-P3.1ST をご使用頂く、もしくは相当の絶縁対策を行ってください。




- ・ピンまたは短絡バーのカット時は導電部に触れないようにしてください。導電部が変形した場合、接触不良を起こす可能性があります。



●短絡バーの取り外しに際して

- ・短絡バーを取り外す際は、短絡バー上面の穴にドライバを挿入し、持ち上げてください。その際、片側から順に持ち上げ、すべてのピンを持ち上げた後、取り外してください。

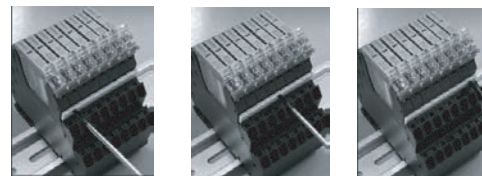


PYDN-6.2ST series

<<Read me first>>


Please use for G2RV/G3RV-ST-□□□.

Cannot be used for G2RV/G3RV-SR-□□□.


- Do not use or store in the following conditions as it may cause a malfunction or deterioration of characteristics.
 - Place where vibration or impact is directly transmitted to the socket.
 - Place where the socket may come into contact with solvents or alkaline substances.
- When installing the short bar, insert it into the insertion hole in the correct orientation, and insert until all terminals are all the way in.



Completely inserted
All terminals are inserted all the way in.
Correct




Incomplete insertion
All terminals are not inserted
all the way in.
Incorrect




Incomplete
insertion

Incorrect installation
Some terminals not inserted
completely.
Incorrect




● Installation of the short bar

- Intermediate pins can be bent by a tool or by hand and cut off for use.

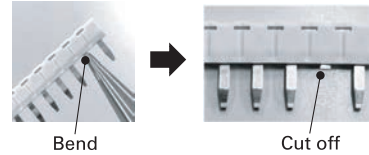

- The short bar can be cut to as many poles as needed. Insert the tool from the plastic part side, and cut along the groove in the plastic part between the terminals. When cutting, take care not to break or deform the terminals. However, since the metal on the cut surface will be exposed, human safety and insulation countermeasures between adjacent products must be ensured. Such countermeasures include using insulating plate/partition plate model P2RV-P3.1ST or taking an equivalent insulation countermeasure.



- When cutting the short bar or its pins, do not touch the conductive part. If the conductive part is deformed, contact failure may result.



● Removing the short bar

- To remove the short bar, insert a screwdriver beneath the rim on top of the short bar and lift up. Start lifting up from either end, lift up all screwdriver in order, and then remove the short bar.

