

Programmable Terminal


## NB Simple

Ethernet for Simple Machine



**3 benefits with Ethernet**

### Faster

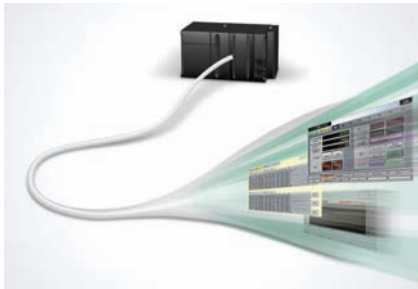


Ethernet increases data transmission speed between PLC and HMI, enabling faster response. Larger amounts of data can be shared.

### More information




Ethernet communications allow you to access all controllers on a production line and the PC from one HMI, which is impossible with serial communications.

### More efficient

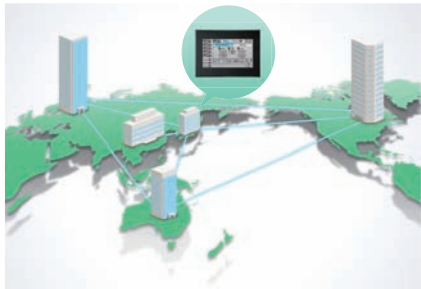

Just start your web browser to see from remote what's going on your HMI.

## NB7W-TW11B (Ethernet)

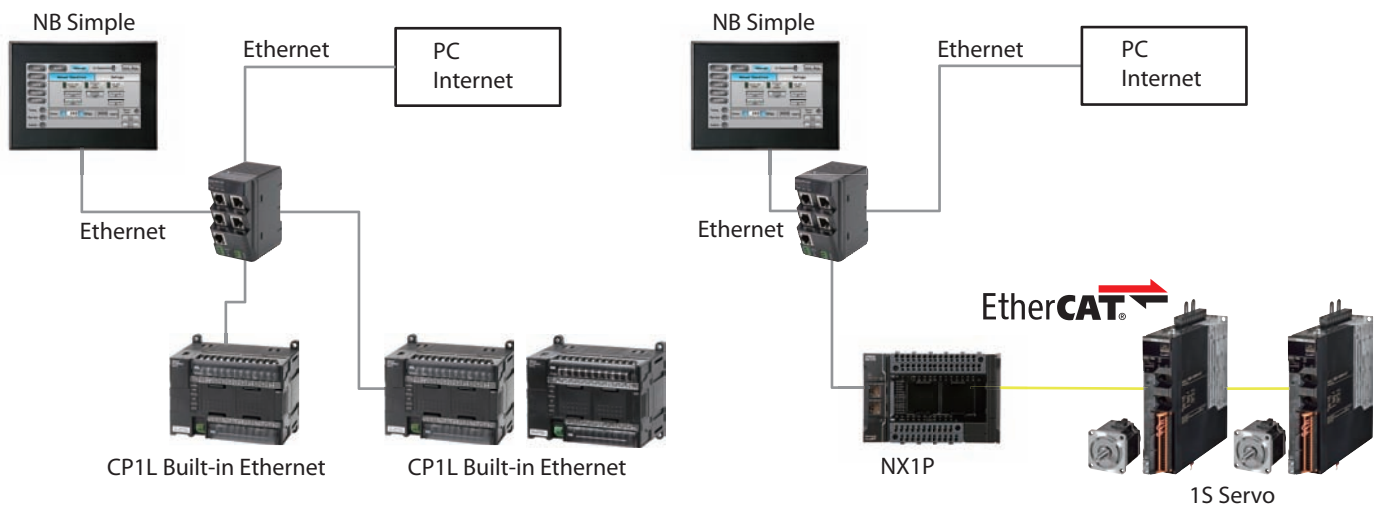

## Specification Comparison between NB Standard and NB Simple

Specifications	Ethernet		Serial	
	Standard	Simple	Standard	Simple
Model	NB7W-TW01B	NB7W-TW11B	NB7W-TW00B	NB7W-TW10B
Clock (RTC)	Built in	—	Built in	—
Battery backup	Provided	—	Provided	—
Front LED	ON when power is ON	—	ON when power is ON	—
Memory interface	USB Memory	—	—	—
External interface	Ethernet, USB Host, Slave RS232C, RS232C/422A/485	Ethernet, USB slave	USB Host, Slave, RS232C, RS232C/422A/485	RS-232C, USB slave
Operation switch	Reset switch, DIP switch	—	Reset switch, DIP switch	—
Obtained standards	EC Directives, KC, cULus508	EU Directives, UL61010-2-201	EC Directives, KC, cULus508	EU Directives, UL61010-2-201
Dimensions (H × W × D mm)	148×202×46			
Panel cutout (H × V mm)	191.0×137.0			
Weight	715 g max.	607 g max.	710 g max.	603 g max.

For detail, refer to the NB-S series User's Manual (Cat. No. V122).

## Ordering Information

Product name	Specifications	Model
NB Simple	7 inch, TFT LCD, 65536 colors, 800 × 480 dots, Ethernet, USB slave	NB7W-TW11B
	7 inch, TFT LCD, 65536 colors, 800 × 480 dots, RS-232C, USB slave	NB7W-TW10B

EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany. Other company names and product names in this document are the trademarks or registered trademarks of their respective companies. The product photographs and figures that are used in this catalog may vary somewhat from the actual products.

**Note:** Do not use this document to operate the Unit.

**OMRON Corporation** Industrial Automation Company  
Kyoto, JAPAN

Contact: [www.ia.omron.com](http://www.ia.omron.com)

### Regional Headquarters

**OMRON EUROPE B.V.**  
Wegalaan 67-69, 2132 JD Hoofddorp  
The Netherlands  
Tel: (31)2356-81-300/Fax: (31)2356-81-388

**OMRON ELECTRONICS LLC**  
2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A.  
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

**OMRON ASIA PACIFIC PTE. LTD.**  
No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark,  
Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711

**OMRON (CHINA) CO., LTD.**  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

**Authorized Distributor:**

© OMRON Corporation 2016 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

**CSM\_1\_2\_1016**  
Cat. No. V438-E1-01

Printed in Japan  
0916 (0616)